



# Manual of INSTALLATION

Welcome to the Unique Wood Tiles installation manual.

This process can be done by yourself or with the help of a professional. In this guide, we will explain step by step how to install our tiles in a simple and effective way, so that you can transform your space with ease and ease.

## Materials needed for installation:



Tape measure or measuring tape



Level (for alignment)



plain manual



Fine sandpaper for wood



Quick-drying plastic adhesive with applicator \*silicone



Jigsaw or Circular Saw



Utility knife and hand saw \*starret;

## Step by Step:

### 1. Surface Preparation

**Cleaning and Preparation:** Before beginning installation, clean the area where the tiles will be installed. Make sure the surface is dry, clean and level. If necessary, use a leveling compound to correct imperfections in the wall/ceiling.

**Measurement:** Use the tape measure to measure the area where the tiles will be applied, remember to consider a 10% loss in the final quantity.



# Manual of INSTALLATION

## **2. Laying the Tiles**

**Positioning/Installation:** Choose the side of the wall/ceiling where you want to start the installation. Apply adhesive glue to the back surface of the tile, making a “zigzag” pattern and start the installation one by one, choosing the pattern of designs you want to obtain on your wall/ceiling. Press lightly so that the tile sticks to the wall/ceiling.

**Alignment:** Use a level to ensure that the tiles are aligned, remembering that there may be a small difference in the final measurements of each tile, as it is a partially handmade product.

**Continue the Process:** Continue positioning the drawings freely and according to your personal taste.

Continue placing the tiles in rows, repeating the process of applying the adhesive glue and aligning them.

## **3. Cut two tiles**

**Precision Cutting:** When you reach the edges of the area or when you come across sockets/switches, you will probably need to cut some tiles. Use the most suitable cutting saw (jigsaw, starret or circular saw), according to the tile material chosen (wood, lacquer or PVC). Use paper tape to cover the cutting area, to avoid damaging the pieces, lightly sand with fine sandpaper after cutting, so the final finish will be perfect.

## **4. Finishing**

**Final Cleaning:** After the adhesive glue has dried (approximately 24 hours), clean it with a cloth slightly dampened with water at the end to remove any dirt or residue.



# Manual of INSTALLATION

## Important Tips:


*For expanded PVC tiles, which can also be used in \*external areas\*, use special quick-drying adhesive glue.*

*Cutting Tiles: If you are inexperienced with cutting tools, consider asking a professional for help or practicing on a scrap piece of tile before cutting the main pieces.*

*Drying Time: Always respect the drying time of the adhesive glue, to avoid compromising the work.*

This is a simplified guide for installing wood, lacquer and PVC tiles. If you are not comfortable with the process, it is always a good idea to consult a professional to ensure the best finish and durability.

## Application possibilities:

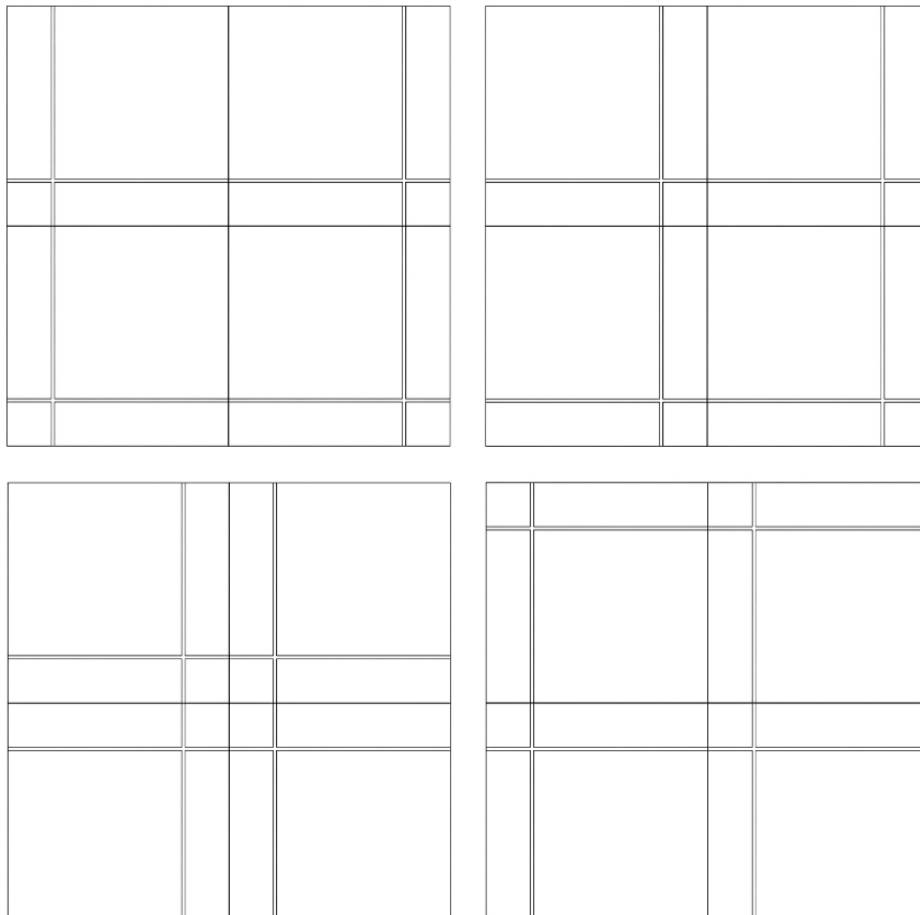



NIQUE  
WOOD TILES

*will revolutionize your decor*

# Manual of INSTALLATION


*YOUR FREEDOM OF EXPRESSION IS OUR BIGGEST GOAL.*





## Technical Specifications


 200mm x 200mm 9mm - thickness

 Outdoor area - product \*Expanded PVC

 25 units per box

 Internal and dry areas  
wood veneer / lacquered product / pvc

 6kg per box - expanded PVC  
10kg per box - wood / lacquer

 Partially handmade product. There may be a slight difference in measurements as well as wood tone because we use natural wood veneers.